


## BRAKE ROTOR SET-UP SHEET, FLOATING

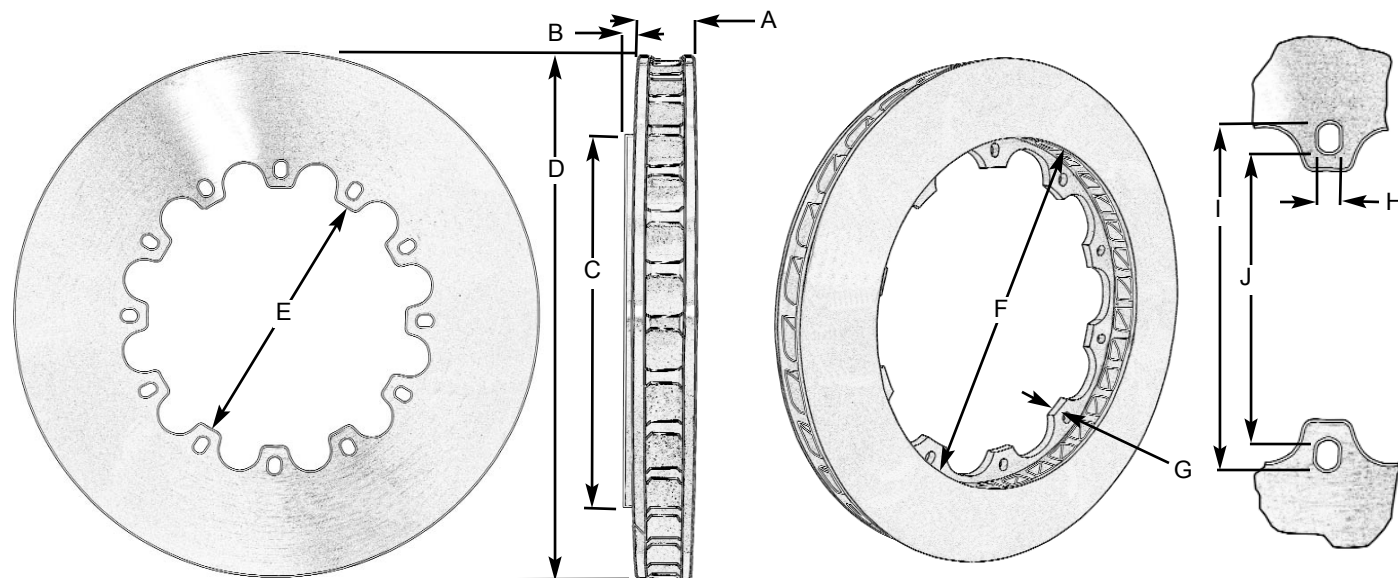


A= \_\_\_\_\_ Thickness  
 B= \_\_\_\_\_ Step Height  
 C= \_\_\_\_\_ Step Diameter  
 D= \_\_\_\_\_ Diameter  
 E= \_\_\_\_\_ Flange Diameter  
 F= \_\_\_\_\_ Eye Diameter

G= \_\_\_\_\_ Flange Thickness  
 H= \_\_\_\_\_ Slot Width  
 I= \_\_\_\_\_ Slot Outside to Outside  
 J= \_\_\_\_\_ Slot Inside to Inside



Approved By: \_\_\_\_\_ Date: \_\_\_\_\_

## BRAKE ROTOR SET-UP SHEET, FLOATING MOUNT

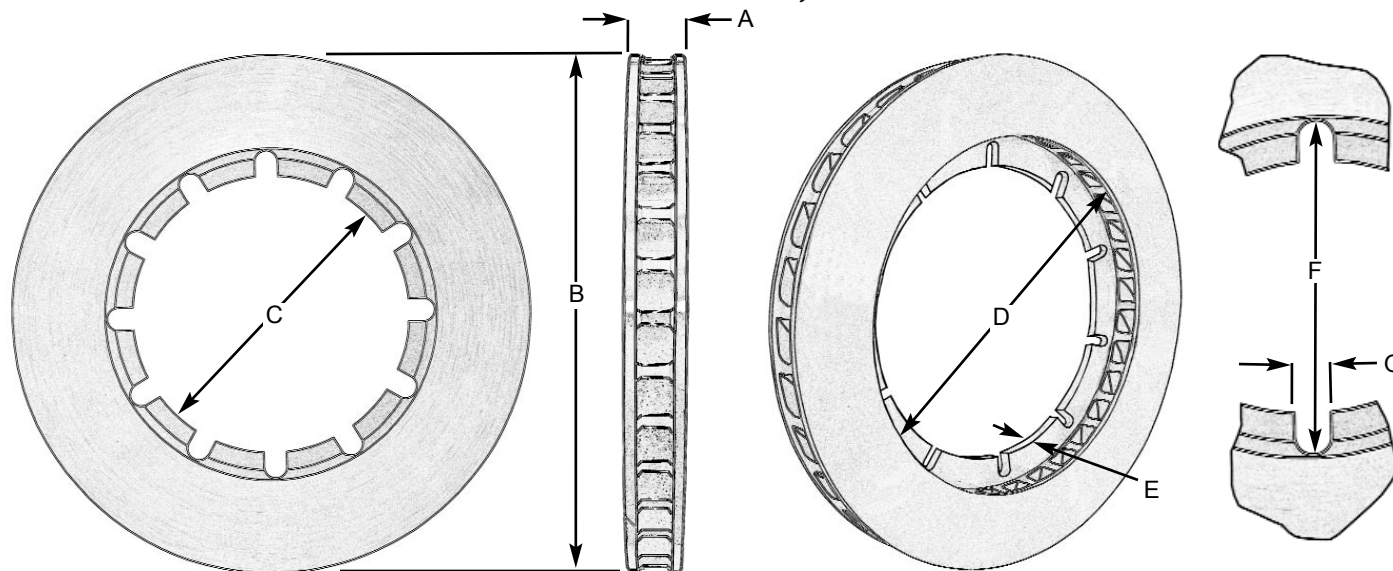

Single Step

Double Step



A= \_\_\_\_\_ Thickness  
 B= \_\_\_\_\_ Diameter  
 C= \_\_\_\_\_ Flange Diameter  
 D= \_\_\_\_\_ Eye Diameter  
 E= \_\_\_\_\_ Flange Thickness  
 F= \_\_\_\_\_ Slot Tip to Tip  
 G= \_\_\_\_\_ Slot Width  
 No. Of Slots \_\_\_\_\_

H= \_\_\_\_\_ 1st Step Depth  
 I= \_\_\_\_\_ 2nd Step Depth  
 J= \_\_\_\_\_ 1st Step Diameter  
 K= \_\_\_\_\_ 2nd Step Diameter

Approved By: \_\_\_\_\_ Date: \_\_\_\_\_

**NOTE:** All custom rotors must have spec sheet, blueprint or sample part. We can not make custom rotors with dimensions supplied over the phone. All spec sheets must be signed and dated by the purchaser or person supplying the sizes. Coleman Machine, Inc. is not responsible for any failure of custom rotors due to improper fit, improper tolerances or any problems encountered with the sizes or design of the finished part when machined to the customers specifications.