

GD9 End Slam Latch

Features

- Precision-made spring loaded latches which have become motor-industry 'standards', with solid, machine-cut steel bolts and 'quick-fit' attachment point if desired
- Adjustable bolt-pull allows bolt projection to be varied, and bolts are reversible to 'nose-up' position
- Normally used as part of a 2-way or 3-way system
- Bolt retracts fully into case either by slam-action or by withdrawing bolt-pull
- Stainless steel model available
- Bolt length can be varied and bolt-nose cut to special profiles. **GD9-G22392** has off-centre pull and special non-reversible bolt

Product Performance

- Bolt spring pressure: 6 kg
- Minimum load for full bolt travel: 5 kg
- Bolt projection variable: 9 - 16 mm

Notes

- Four holes, 5.5mm diameter, through both thicknesses of material




GD9-G22387
(with plain bolt pull)


GD9-G22386
(with 'quick-fit' attachment point)



GD9-G22388
(‘nose-up’ bolt allows use on inward-opening doors)

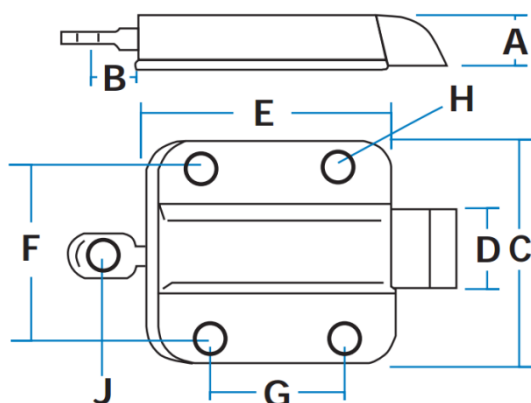

Part No.	Type	Material	A	B	C	D	E	F	G	H	J
GD9-G22386	Nose-down, 'quick-fit' pull	Mild steel (CR4), zinc plated	13	13	57	19	62	44.5	33	ø5.5	ø5
GD9-G22387	Nose-down, plain bolt pull										
GD9-G22388	Nose-up, plain bolt pull										
GD9-G22389	Nose-up, 'quick-fit' pull										
GD9-G22392	Special (non-reversible)										
GD9-G01187	Nose-down, plain bolt pull	Stainless steel 304, mill finish									



Detail of 'quick-fit' attachment. The cropped rivet allows fast attachment of link bar as shown. A wave washer prevents rattle and excessive 'play'.



Suggested link bar **G12497**, length 915 mm. Linkage bar is pierced to accept rivet and allow 22 mm free movement.